




# SUPREMA-MVC

## Motorcycle Valve Seat Milling Machine

VALVE SEAT MILLING MACHINE

 MADE IN BRAZIL

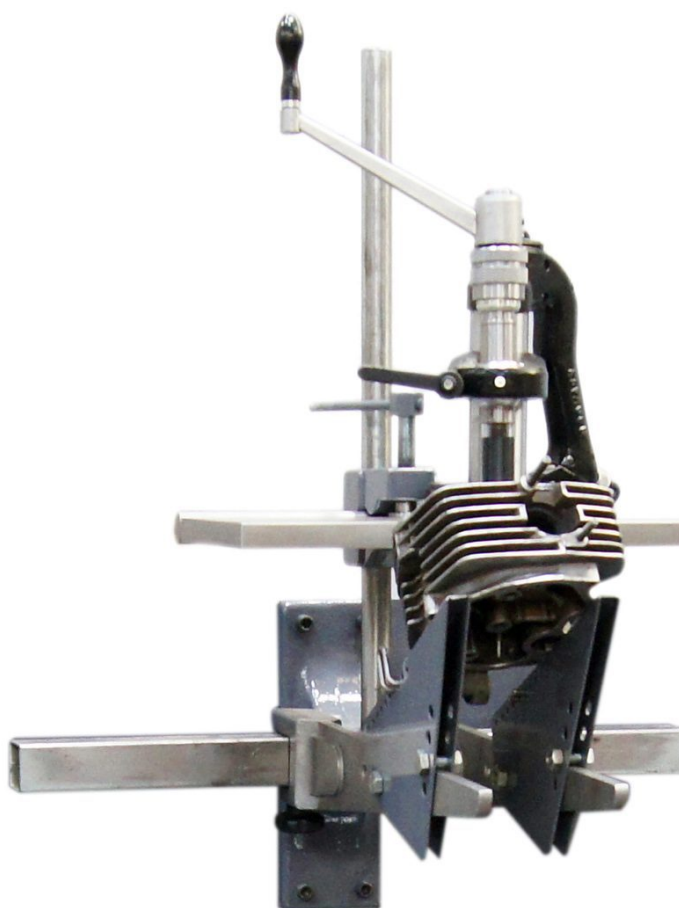

SUPREMA-MVC (Series C) portable valve seat milling machine for seats 0.71–1.57 in (18–40 mm) in motorcycle cylinder heads. Includes electromagnet with column, lever, vacuum gauge, and diamond-tip tool dresser.



## Technical Specifications

### CAPACITY

|                                               |                                            |
|-----------------------------------------------|--------------------------------------------|
| Valve seat grinding capacity – min.<br>~ max. | 0.709 in ~ 1.575 in (Ø<br>18 mm ~ Ø 40 mm) |
|-----------------------------------------------|--------------------------------------------|

### EQUIPMENT / STRUCTURE

|                                                       |                                                                                                                                                                                                                                       |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (01) Electro-magnet                                   | with (01) column and<br>(01) tool-holder<br>spindle                                                                                                                                                                                   |
| (01) Vacuum gauge                                     | for checking valve<br>seating                                                                                                                                                                                                         |
| (01) Lever                                            | for rotating the tool-<br>holder spindle                                                                                                                                                                                              |
| (01) Tool sharpener                                   | with (01) diamond<br>stone                                                                                                                                                                                                            |
| (01) T-9 tightening wrench and<br>(02) Allen wrenches |                                                                                                                                                                                                                                       |
| (02) Tool-holder capsules                             | nos. 2000 and 2001                                                                                                                                                                                                                    |
| (03) Cutting tools                                    | nos. 41155, 41156, and<br>L-12 (90 degrees)                                                                                                                                                                                           |
| (09) Hardened and ground pilot<br>guide shafts        | Ø 0.1598 in (4.06 mm);<br>Ø 0.1957 in (4.97 mm);<br>Ø 0.1961 in (4.98 mm);<br>Ø 0.2138 in (5.43 mm);<br>Ø 0.2146 in (5.45 mm);<br>Ø 0.2150 in (5.46 mm);<br>Ø 0.2157 in (5.48 mm);<br>Ø 0.2161 in (5.49 mm);<br>Ø 0.2583 in (6.56 mm) |

Specifications subject to change without notice. Some capacities listed may require optional accessories. Confirm exact dimensions during quotation.