



RMG-460X

Flywheel and Clutch Disc Grinder RMG-460X Chinelatto

FLYWHEEL AND CLUTCH DISC MACHINES

 **MADE IN BRAZIL**



OTHER VIEWS



Rectified engine flywheel in cast iron with smooth surface and ring gear on the edge



Flywheel and Clutch Disc Grinder RMG-460X
Chinelatto - view 2

RMG-460X grinder for flywheels and clutch discs with 18-inch (Ø460mm) rotary table, dual speed 16-32 RPM and 20-inch (Ø500mm) maximum capacity. 10hp motor ensures precise grinding in specialized workshops.



RMG-460X

FLYWHEEL AND CLUTCH DISC GRINDER RMG-460X CHINELATTO



Technical Specifications

CAPACITY

Rotary table - diameter	Ø 18.7/64"
Grinding capacity - diameter	Ø 19.11/16"
Height - rotary table - grinding wheel	Ø 8.15/32"
Grinding wheel - diameter	Ø 7"

ROTATIONS SPEEDS

02 Rotating table speeds	16 - 32 rpm
01 Grinding wheel speeds	3.500 rpm

MOTOR RATINGS

Grinder head motor	5.62 kw
Rotating table motor	1.12 kw
Cooling pump	0.09 kw

ELECTRIC POWER

Normal electric power	220 volts - 60hz - 3 ph
Motor power	9.801 kw

DIMENSIONS - WEIGHT

Machine Dimensions (Length x Width x Height)	55" x 39" x 74"
Running Machine Dimensions (Length x Width x Height)	63" x 39" x 74"
Maritime packing (Length x Width x Height)	55" x 39" x 78"
Net - Gross Approx. weight	1.122 lb / 1.320 lb

STANDARD ACCESSORIES

- 01 Grinding wheel diameter 5"
- 01 Grinding wheel clutch nut
- 01 Tool of clutch grinding wheel
- 01 Tool grinding wheel 5"
- 01 Tool grinding wheel 7"

STANDARD ACCESSORIES (CONT.)

- 01 Centralizer tape of steering wheel with 01 screw
- 01 Steering wheel
- 01 Allen tool
- 01 Grinding wheel flange lock bolt
- 01 Column lock tool
- Technicals specifications subjected to change.

Specifications subject to change without notice. Some capacities listed may require optional accessories. Confirm exact dimensions during quotation.


ACCESSORIES, FIXTURES AND DETAILS

01



Standard accessory — Grinding wheel dressing device with diamond tip in operation, conditioning abrasive surface during grinding

02

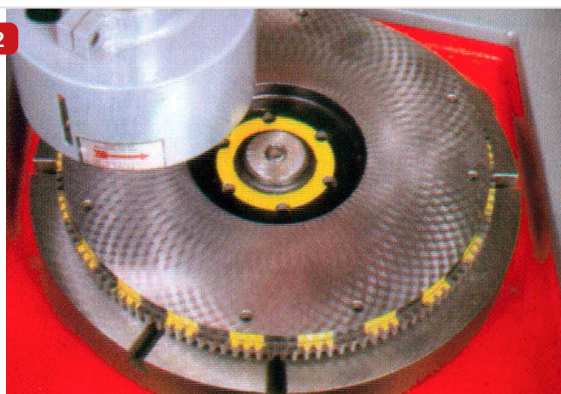

Detail — Ground flywheel positioned on Ø18 inch (Ø460mm) rotary table of RMG-460X with centering device



RMG-460X

FLYWHEEL AND CLUTCH DISC GRINDER RMG-460X CHINELATTO




Accessories, fixtures and details (continued)




Standard accessory — Complete kit with grinding wheel, flanges, wrenches and tools for RMG-460X grinder



Standard accessory — Coolant reservoir with 0.12 hp electric pump and circulation system for RMG-460X grinder

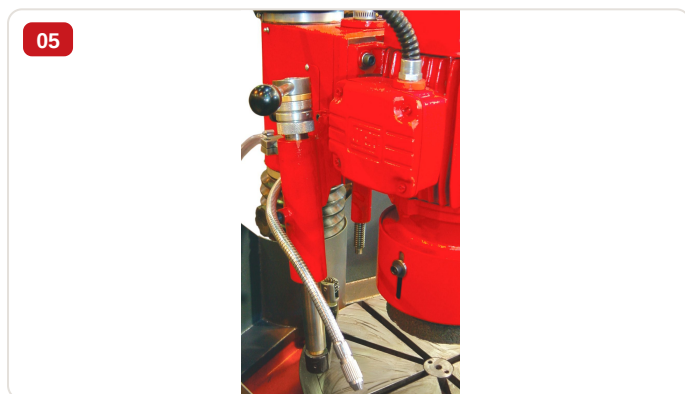

Detail — Articulated flexible coolant nozzle with directional metal hose

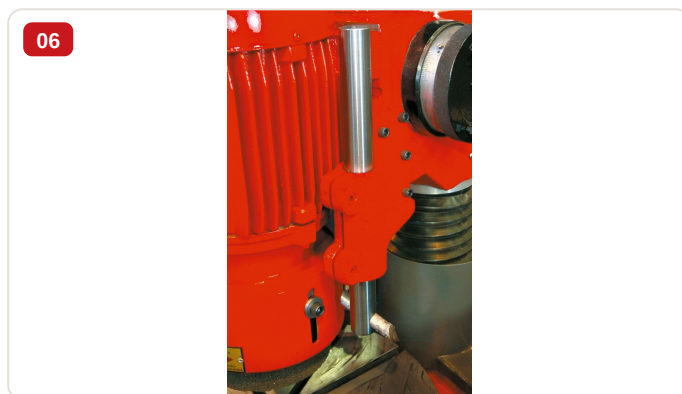

Standard accessory — Corner breaking tool in steel on RMG-460X grinder