



PV-1500


Crankshaft Polishing Machine PV-1500 Chinelatto - 15.7X59" 3HP Motor

CRANKSHAFT POLISHING MACHINE

 **MADE IN BRAZIL**



OTHER VIEWS

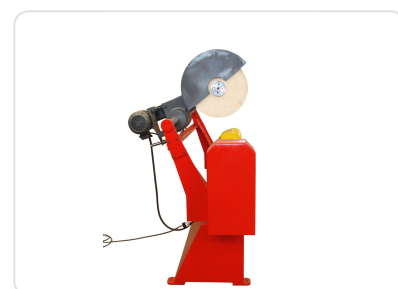

PV-1500 Chinelatto crankshaft polisher with Ø20 inch (Ø500mm) polishing disc and 3hp motor for grinding



PV-1500 Chinelatto crankshaft polisher with 3hp motor and Ø15.7x59 inch (Ø400x1500mm) capacity



Crankshaft polisher PV-1500 Chinelatto Ø16x59 inch (Ø400x1500mm) with 3hp motor and Ø20 inch (Ø500mm) polishing disc

Professional crankshaft polisher for parts up to 15.7X59" (Ø400x1500mm) with 19.7" (Ø500mm) polisher and 3HP motor. 780RPM polishing speed, ideal for specialized automotive rebuilding shops



PV-1500

CRANKSHAFT POLISHING MACHINE PV-1500 CHINELATTO - 15.7X59" 3HP MOTOR



Technical Specifications

CAPACITY

Max. Capacity - diameter swing over table x lenght	Ø 15.3/4" x 59.1/16"
02 - Crankshaft revolutions	14 - 34 rpm
01 - Polisher revolution	780 rpm
Crankshaft plate - diameter	Ø 6"
Polisher diameter	Ø 19.11/16" x 3/4"

MOTOR

Crankshaft rotation	0.736 kw
Polisher rotation	2.22 kw

ELECTRIC POWER

Normal electric power	220 volts - 60hz - 3 ph
Motor power	2.983 kw

DIMENSIONS - WEIGHT

Machine Dimensions (Length x Width x Height)	94" x 47" x 74"
Running Machine Dimensions (Lenght x Width x Height)	94" x 47" x 74"
Maritime packing (Length x Width x Height)	94" x 49" x 70"
Net - Gross Approx. weight	1.235 lb / 1.543 lb

STANDARD ACCESSORIES

- 01 Universal plate Ø 6"
- 01 Felt disk Ø19.11/16" x 3/4"
- 01 Revolving counterpoint

OPTIONAL ACCESSORIES

- Felt disc Ø 15.3/4" x 3/4"
- Felt disc Ø 15.3/4" x 1.3/16"
- Felt disc Ø 19.11/16" x 9/16"
- Felt disc Ø 19.11/16" x 3/4"

OPTIONAL ACCESSORIES (CONT.)

- Felt disc Ø 19.11/16" x 1"
- Felt disc Ø 19.11/16" x 1.3/16"
- Felt disc Ø 19.11/16" x 1.9/16"
- Felt disc Ø 23.5/8" x 1.3/16"
- Mass to polish: normal and/or extra fine for brightness
- Technicals specifications subjected to change.

Specifications subject to change without notice. Some capacities listed may require optional accessories. Confirm exact dimensions during quotation.