




TESTRIM

Cylinder Head Pressure Tester TESTRIM - 201°F Heating

CYLINDER HEAD PRESSURE TESTER

 MADE IN BRAZIL

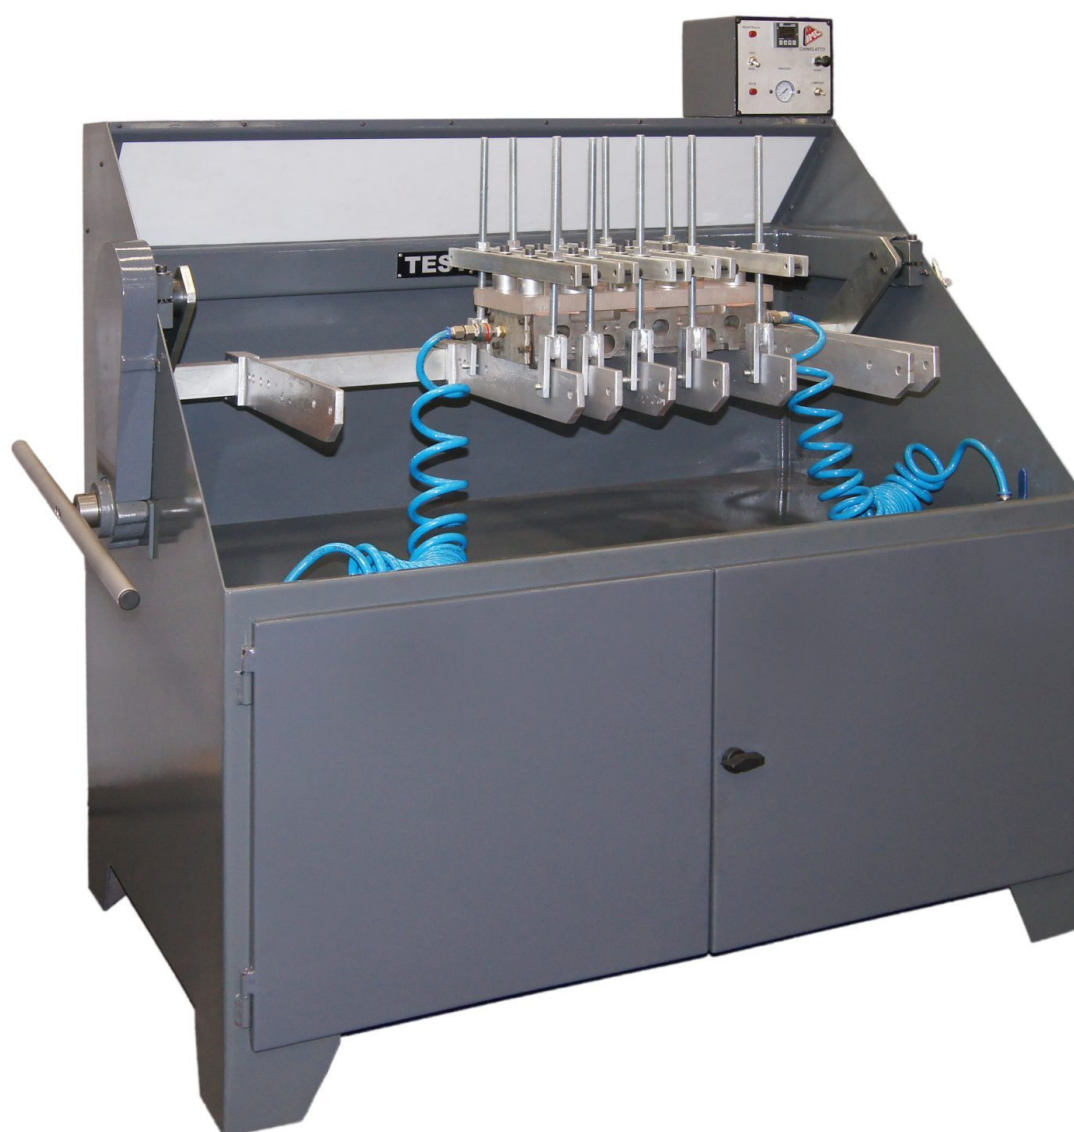

Detects cracks and leaks in cylinder heads with heating up to 201°F (92°C) and 180° tilt. Max capacity 47X18.5 inches (1200X470MM), 14.3 gal tank, 7HP heating. Professional engine shops



TESTRIM

CYLINDER HEAD PRESSURE TESTER TESTRIM - 201°F HEATING



Technical Specifications

CAPACITY

Capacity - max. length x width of cylinder head to test	47.24 x 18.50 in
Maximum cylinder head tilt rotation	180°
Heating resistance power	7.0 hp
Electro-pump	0.5 hp
Water tank - capacity	54 lt
Temperature controller with display	Max. 92° C
Water heating time	20 minutes

ELECTRICAL VOLTAGE

Standard installed electrical voltage	220 Volts - 60Hz - 3 phases
Installed power	5.623 kW

DIMENSIONS - WEIGHT

Machine dimensions (Length x Width x Height)	5.45 x 2.62 x 4.99 ft
Machine dimensions in operation (Length x Width x Height)	5.45 x 2.62 x 4.99 ft
Maritime packaging (Length x Width x Height)	6.23 x 3.94 x 5.41 ft
Approx. Net - Gross weight	705.6 lbs / 992.3 lbs

STANDARD ACCESSORIES

- 01 Milky acrylic plate 0.20 x 52.17 x 10.04 in
- 06 Transparent acrylic plates:
 - = 14.57 x 7.09 x 0.98 in - 19.69 x 5.91 x 0.98 in - 19.69 x 9.45 x 0.98 in
 - = 6.30 x 9.45 x 0.98 in - 9.45 x 30.71 x 0.98 in - 27.17 x 7.48 x 0.98 in
- 08 Supports for flat cylinder heads
- 02 Supports for angled cylinder heads
- 08 Locking bars
- 16 Threaded shafts with nut

STANDARD ACCESSORIES (CONT.)

- 01 Tightening wrench
- 53 Rubber sealing pieces for valve seats
- 33 Sealing plates
- 01 Electronic water temperature controller
- 01 Electrical panel with air/water circulation time relays
- 01 Compressed air injection gun
- 01 Air filter
- 02 Quick-connect nozzles for sealing plates

OPTIONAL ACCESSORIES

- Extra transparent acrylic plates

Specifications subject to change without notice. Some capacities listed may require optional accessories. Confirm exact dimensions during quotation.

ACCESSORIES, FIXTURES AND DETAILS



Detail — TESTRIM pressure tester with mounted cylinder head for crack and leak detection



TESTRIM

CYLINDER HEAD PRESSURE TESTER TESTRIM - 201°F HEATING



Accessories, fixtures and details (continued)

02



Detail — Control panel of TESTRIM pressure tester with digital display, pressure gauge and controls

03



Standard accessory — Complete TESTRIM tester accessory kit with acrylic plates, supports and seals for cylinder heads